Tire Direct
La nueva generación

AMULET

Long Haul	Regional	On & Off Road	Off Road	Coach&Urban
				

Steer

07 AT501 10 AT505 11 AF508

Drive

08 AD165 09 AD507 12 AD506 13 AD515

15 AD218

All-Position

14 AA612 16 AA615 17 AA610 18 AD189 19 AC121 20 AU555

Amulet tires provide:

- Advanced Engineering & Technology
- Enhanced footprint provides stability & excellent weight displacement
- Premium 4 steel belt construction in 22.5 & 24.5

AT501

Application

Medium and long mileage trucks running on paved and highway roads

- Ultra Wear Resistance
- Outstanding High Speed Performance
- Excellent Durability

Suitable

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	12.5	797	233
225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13.0	839	248
255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AD165

Application

Medium and long mileage vehicles running on paved roads

- Low Heat Generation
- High Wear Resistance
- Excellent Grip
- Economy and Environment Friendly

Suitable

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	125	125	18.0	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AD507

Application

Long Haul Drive

- Excellent grip
- Excellent durability
- Excellent traction
- Excellent cost performance

Suitable



High rigidity pattern design.
Low rolling resistance with lower deformation in rotation by special pattern design.
Excellent compound design promotes cool-running and excellent traction.

Stronger tie-bar design provides even wear and longer tread life.

Extra long mileage with more contact surface.

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	23.5	1059	279
11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	23.5	1059	279
11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	23.5	1110	279
11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	23.5	1020	298
295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	23.5	1020	298
285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	23.5	1056	283
285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	23.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AT505

Application

Steer and All-Position

- Long tread life and great high speed stability
- Durable and wear-resistant sidewall
- Resists heat build-up
- Low noise emissions and reduced stone retention

Suitable



High wear resistance
Long tread life

Economical and Green

Excellent cost -performance

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	12.5	930	255
315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	125	125	17.0	1076	312
11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	16.5	1054	279
11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	16.5	1054	279
11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AF508

Application

Regional Steer

- ☑ Reduced Noise
- ☑ High Durability
- ☑ High Strength

Suitable



Stability
The tread groove design provides excellent stability and greater mileage.

High Scrub Resistance
Special tread rubber formula offers better scrub resistance.

Excellent Handling
Unique groove design provides excellent handling.

Economical and Green
Low rolling resistance reduces fuel consumption making the tire both economical and green.

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	15.0	1054	279
11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	15.0	1054	279
11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279
255/70R22.5	16	140/137M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255
295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	16.5	1014	298
295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	16.5	1014	298
285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	16.5	1050	283
285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	16.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AD506

Application

Medium and long mileage trucks running on paved and highway roads

- ☑ Low Heat Generation & Wear Resistance
- ☑ Excellent Grip
- ☑ Economy and Environment Friendly

Suitable



Low-temperature mixing technology is used to improve wear resistance and reduce heat generation.

Seperated block pattern design brings outstanding grip.

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	15.0	767	211
235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	15.0	797	233
225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	15.0	811	226
245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	15.5	839	248

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AD515

Application

Regional Drive

- ☑ Excellent traction
- ☑ Better grip
- ☑ Tread chunking resistance

Suitable



Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	21.5	1059	279
11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	21.5	1059	279
11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	21.5	1110	279
11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	21.5	1110	279
295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	21.5	1014	298
295/75R22.5	16	146/143 L	9.00	3000	2575	6610	6005	830	830	120	120	21.5	1014	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AA612

Application

All-Position

- ☑ Excellent durability
- ☑ Cool running

Suitable

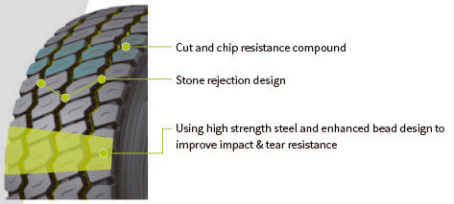

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)	Max. Load (lbs)	Pressure (kPa)	Pressure (PSI)	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
385/65R22.5	24	164 K	11.75	5000	11000	900	130	17.5	1072	389
425/65R22.5	20	165 K	12.25	5150	11400	830	120	17.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AD218

Application

Mixed Service Drive



- ☑ Long tread life
- ☑ Maximum traction
- ☑ Cut & Chip resistant compound
- ☑ Better durability

Suitable

Wear resistant compound offers longer overall tire life

Enhanced bead structure design improves load carrying capacity

New tread pattern design offers excellent grip capacity

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	22.5	1059	279
11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	22.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AA615

Application

All-Position



- ☑ Ultra Wear Resistance
- ☑ High Stability on Handling
- ☑ High Load Capacity

Suitable

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	17.5	1054	279
11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AA610

Application

Mixed Service-All Position

- Excellent durability
- High strength
- Cut and Chip resistant compound

Suitable

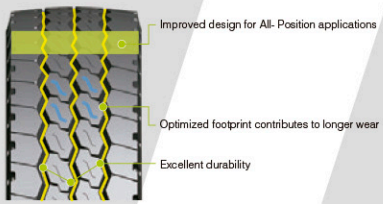

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	14	144/142 K	8.25	2800	2650	6175	5840	720	720	105	105	17.5	1054	279
11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	17.5	1054	279
11R24.5	14	146/143 K	8.25	3000	2725	6610	6005	720	720	105	105	17.5	1104	279
11R24.5	16	149/146 K	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AD189

Application

Short mileage vehicles running on unpaved roads

- Cut Resistance
- Excellent Grip
- Avoid Damage on Tread

suitable

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	18	149/146 G	9.00	3250	3000	7160	6610	930	930	123	123	23.5	1054	279
11R24.5	16	149/146 G	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AC121

- Ultra Wear Resistance
- Superior Ride Comfort
- Outstanding Handling and Brake Performance on Wet

Suitable

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
295/80R22.5	18	152/149 M	9.00	3550	3250	7830	7160	930	930	135	135	15.0	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

AU555

Application

Short mileage vehicles running on paved roads

- Ultra Wear Resistance
- Damage Resistance On Sidewall
- Outstanding High Speed Performance

Suitable

Size	PR	LI/ SS	Standard Rim	Max. Load (kgs)		Max. Load (lbs)		Pressure (kPa)		Pressure (PSI)		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
				S	D	S	D	S	D	S	D			
11R22.5	16	148/145 J	8.25	3150	2900	6940	6395	850	850	123	123	20.0	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs